

■ AC220V TYPE



Light shower for track 25W



Perfect Waterproof & nonglare track Lighting

- Oneside direction: Only the work surface can be released during installation
- Perfect waterproof, moistureproof, dustproof
- lighting light work surfaces evenly
- a high-end design




■ Specification

Total flux	Illuminance(1m)	Beam angle	CRI	CCT
1,550(lm)	2,890(lux)	one side 20°	over 80	6,000K / 3000K

IP level	Weight	Operating temperature	Power consumption	Input voltage	PF
IP67	1 Kg	-20~40°C	25W	AC220V	over 0.9

■ Dimension (600mmX40mmX25mm)

Dimension

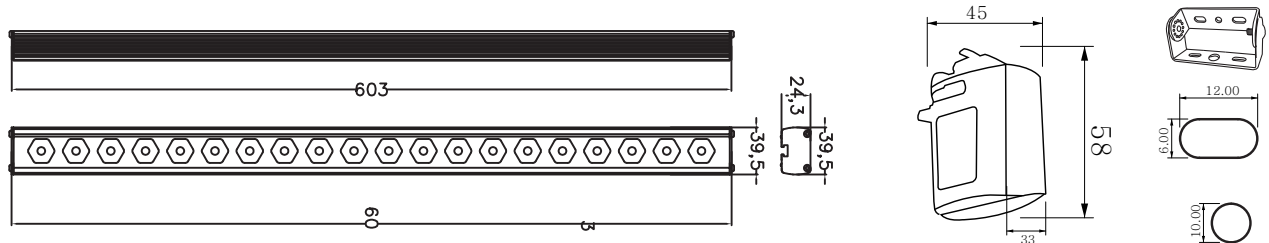

■ 적용분야 (Interior, landscape)

